SFKx2 Conrod linkage instructions - SFK CONROD LINKAGE

Engineered to win

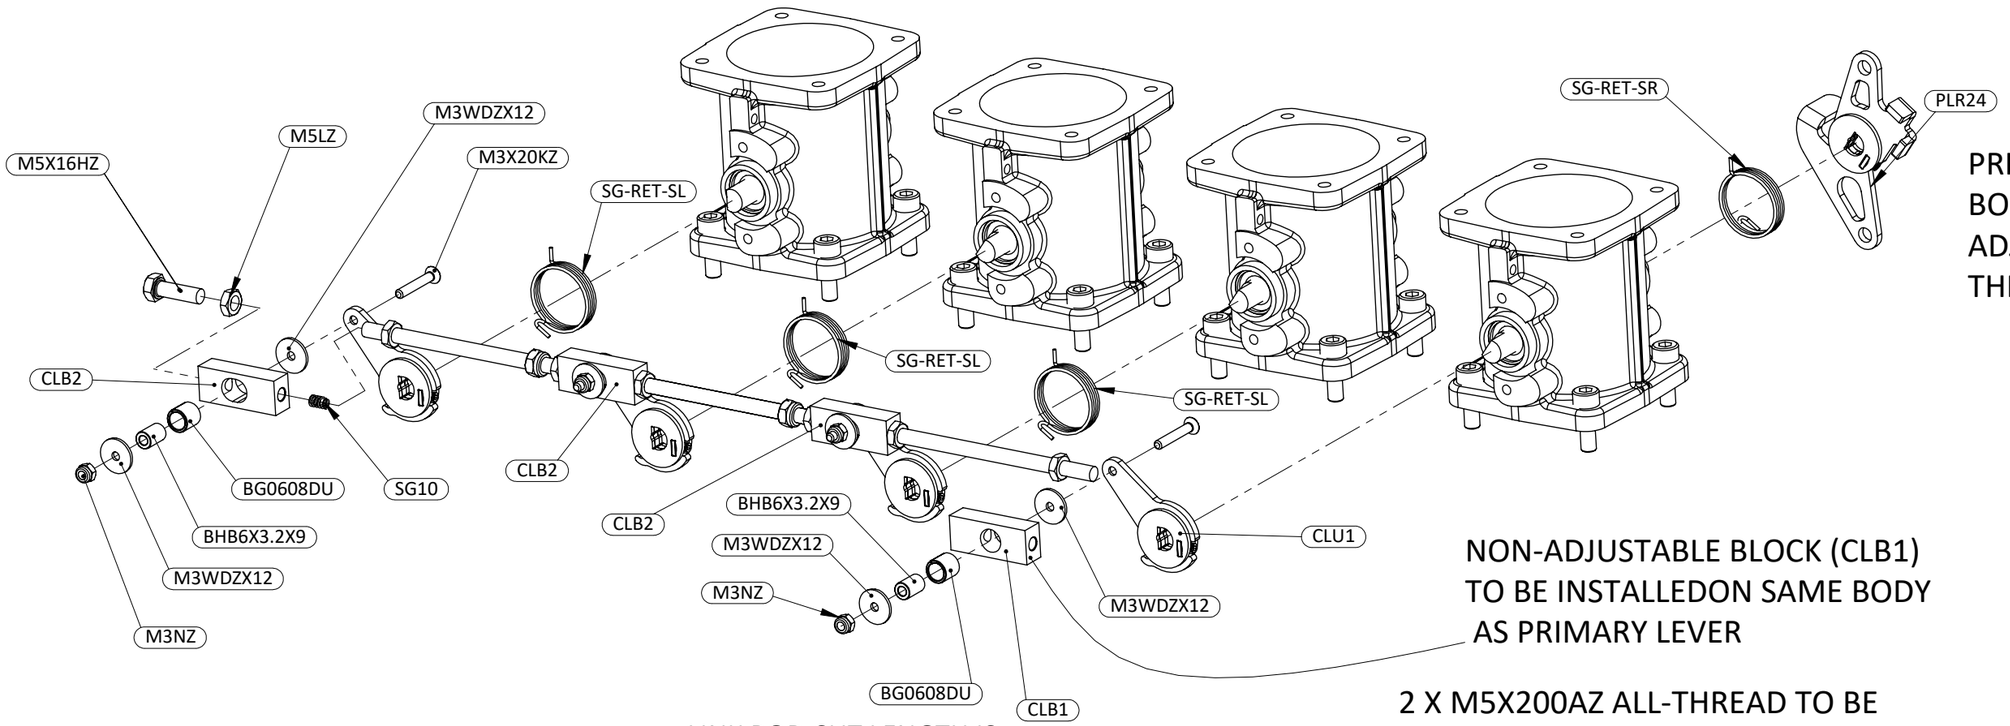

PRIMARY LEVER INSTALLED ON BODY FOR MASTER IDLE ADJUSTMENT & THROTTLE ACTUATION IF REQUIRED

NON-ADJUSTABLE BLOCK (CLB1) TO BE INSTALLEDON SAME BODY AS PRIMARY LEVER

2 X M5X200AZ ALL-THREAD TO BE SENT SEPERATELY WITH PARTS

LINK ROD CUT LENGTH IS:
CENTRE DISTANCE BETWEEN BODIES - 13MM

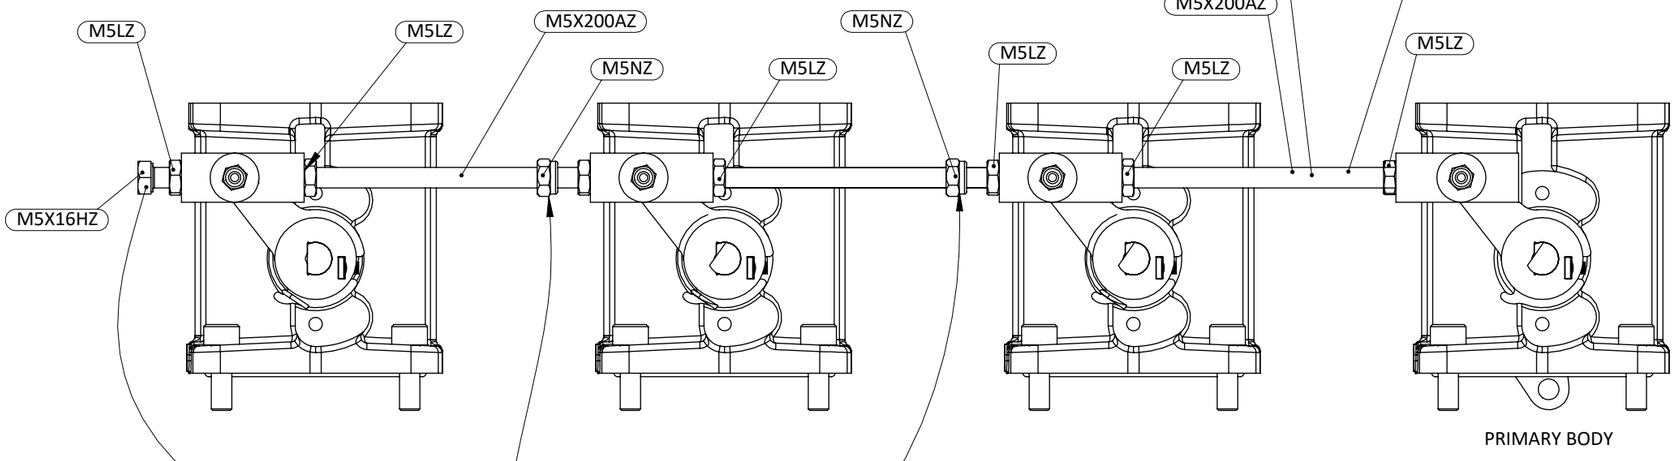

SCREW IN TO INCREASE OPENING OF NEAREST BODY.
THEN SET WITH LOCNUTS

FOR BALANCING - START WITH BODY FURTHEST FROM PRIMARY BODY

Frame: 1 of 1	
Version: 1	

Tel 01746 768810

© JENVEY DYNAMICS LTD. 2021

Web WWW.JENVEY.CO.UK